DWG. No.	MR300314A1
TITLE	Digital Mass Flow Device ST-500/550

RJ45 Modular Jack :
EtherCAT communication IN/OUT

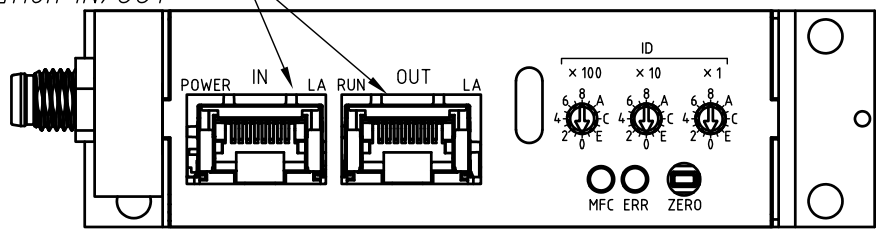

5 Position Circular Connector (M8.FMLE):
Power connector

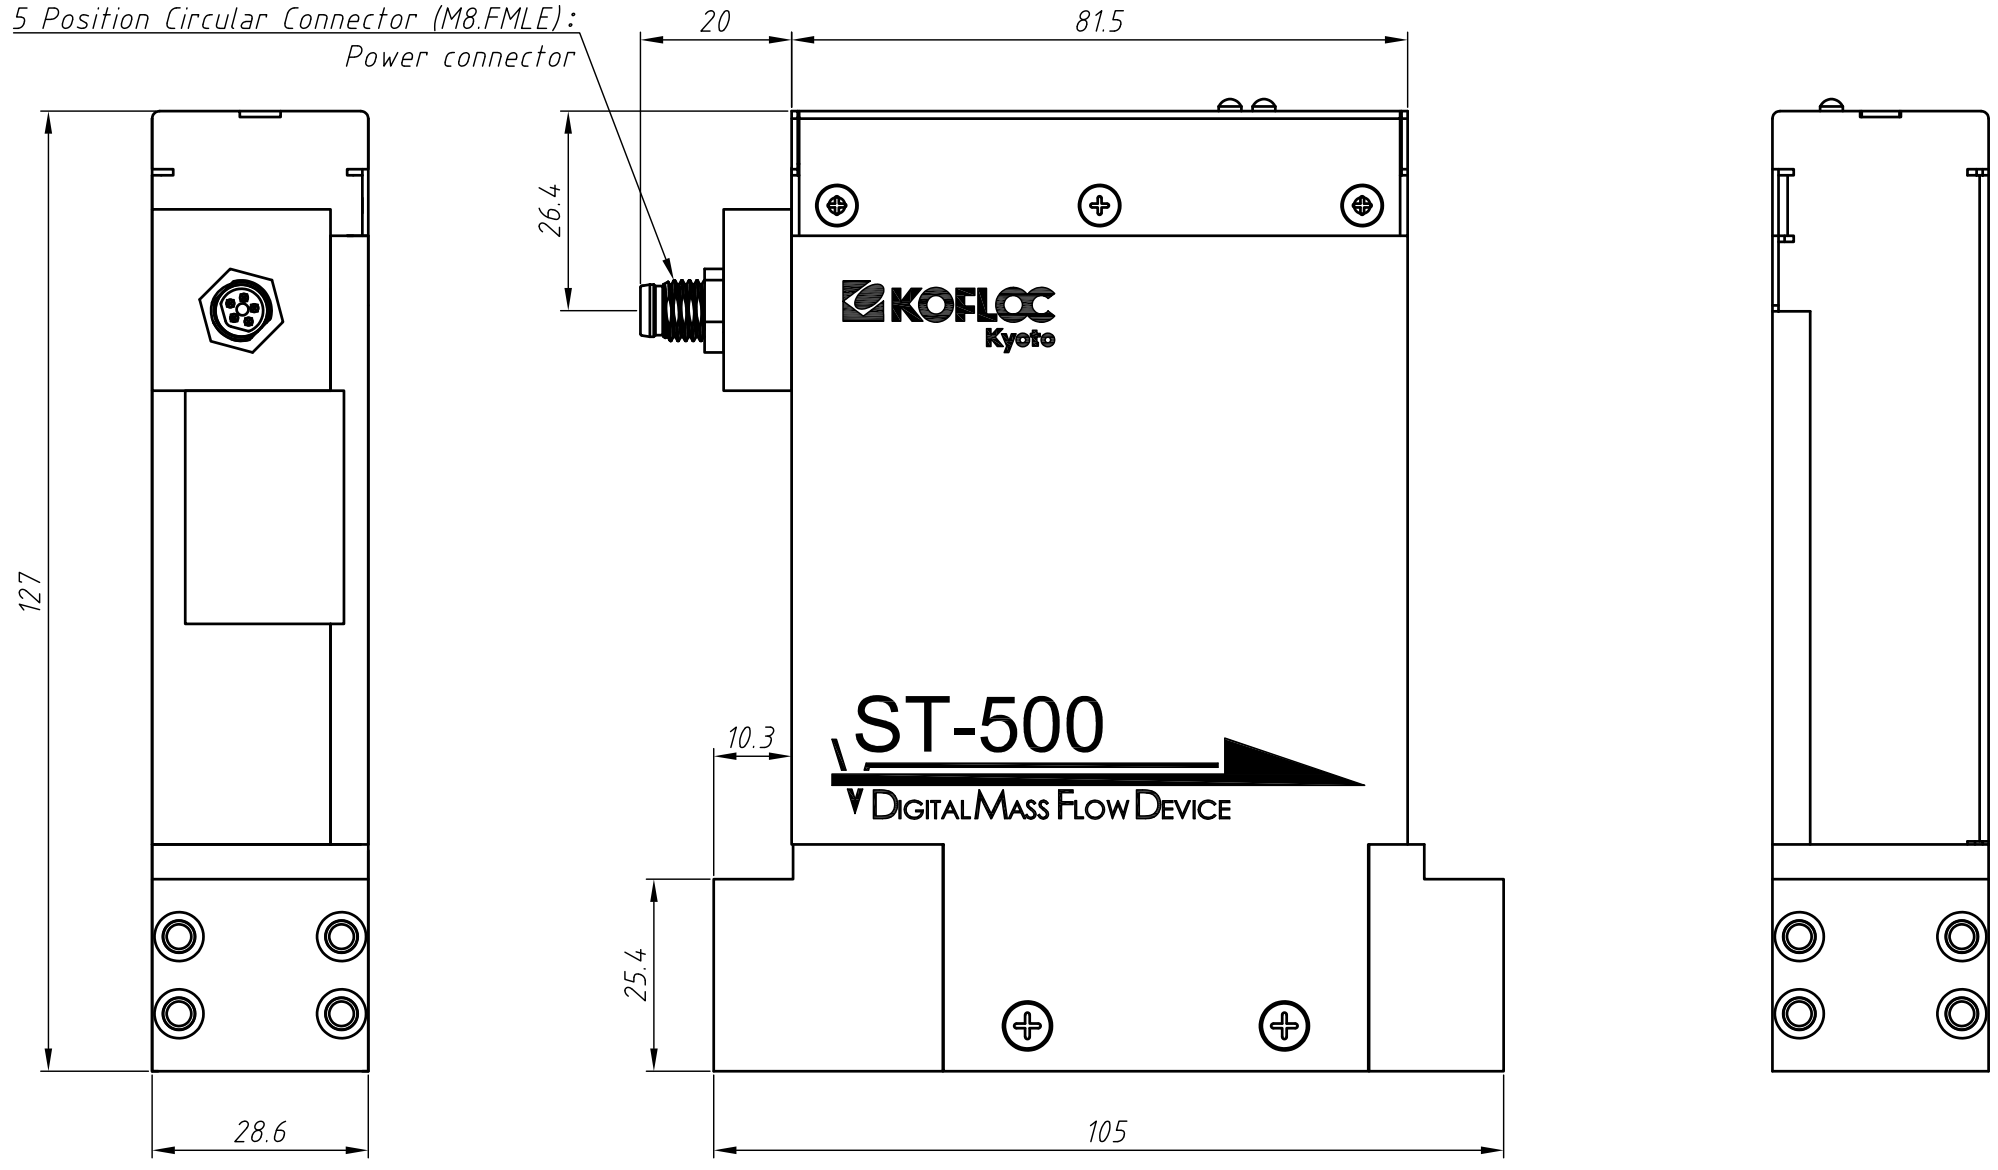

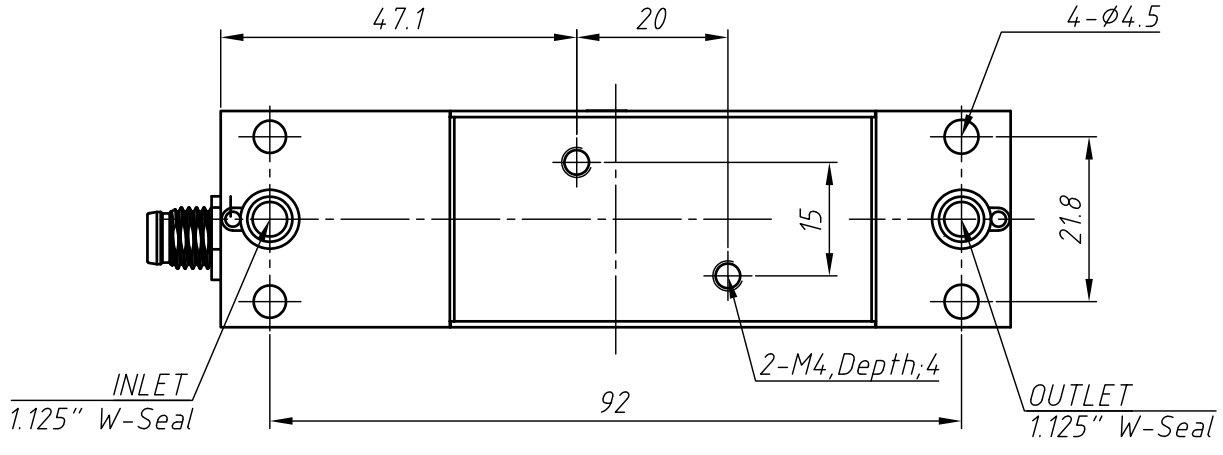

Specifications
Fluid:
Flow rate:

【5 Position Circular Connector】

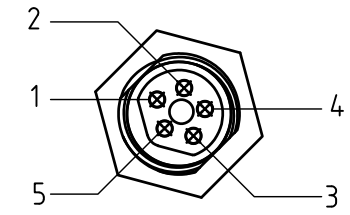

Pin number	Signal name
1	24VDC
2	N.C.
3	COM
4	N.C.
5	N.C.

【RJ45 : EtherCAT communication IN/OUT】



Pin number	Signal name
1	TX+
2	TX-
3	RX+
4	N.C.
5	N.C.
6	RX-
7	N.C.
8	N.C.

No.	NAME	SPECIFICATIONS	NOTES
SCALE	1 : 1	PROJECTION	
Rev.			

KOFLOC Corp.

DESIGNED	DRAWN	CHECKED	APPROVED
DATE	/ /		